

REACT 350® WIDE SYSTEM

A REUSABLE
CRASH CUSHION
FOR WIDE
ROADWAY
HAZARDS



OVERVIEW

The REACT 350 Wide System is a redirective, non-gating crash cushion that meets NCHRP 350, Test Level 3. It features smart plastic cylinders made of high molecular weight, high-density polyethylene (HMW/HDPE) plastic that are arranged to shield rigid hazards with system widths of 1.525 m (60), 2.440 m (96) and 2.050 m (120).


When impacted within the design capacity specified in NCHRP 350, the cylinders typically regain up to 90% of their original shape and capacity without maintenance or repair of major components.

MEETS NCHRP 350, TEST LEVEL 3

The REACT 350 Wide System meets NCHRP 350, Test Level 3 criteria as a redirective, non-gating crash cushion. During a head-on impact, at speeds up to 62mph, the cylinders compress to absorb the energy of impact and bring the vehicle to a controlled stop. During side angle impacts up to 20°, the REACT 350 Wide Systems redirect the errant vehicle back onto the roadway at a shallow angle. This redirection is the result of internal struts within the cylinders (except the nose).

FEATURES AND BENEFITS

- Self-restoring and reusable after most impacts
- Able to withstand a number of impacts without the need for major repairs or parts
- Minimal maintenance and refurbishment spare parts typically not required
- Low life cycle cost in comparison to disposable systems

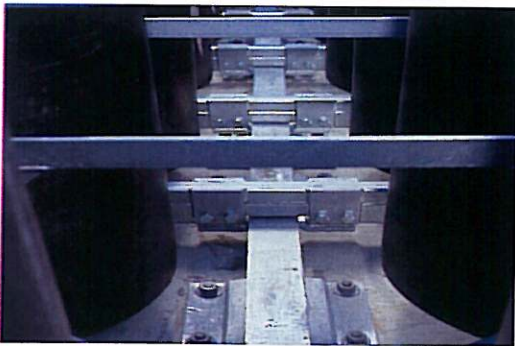

The REACT 350 System uses a monorail to provide lateral strength.



ENERGY ABSORPTION
SYSTEMS, INC.

SAVING LIVES BY DESIGN®

www.energyabsorption.com

REACT 350[®] WIDE SYSTEM


MINIMAL MAINTENANCE AND REFURBISHMENT

After a typical design impact, the REACT 350 Wide System can be quickly restored by simply over pulling the system out and replacing the shear bolt. Spare parts are typically not required. Limited exposure to traffic provides for optimum safety for maintenance workers. Very high reusability allows for exceptional life-cycles savings.

The REACT 350 Wide System is available with a steel backup or a concrete-mounted backup. The concrete-mounted backup allows the unit to be attached directly to an existing or new concrete backup at the site. The steel backup allows the System to be placed at sites where a stand alone system is required.

SPECIFICATIONS

	SELF CONTAINED BACKUP	CONCRETE-MOUNTED BACKUP
60" TL-3	1.5M (60")	1.5 M (60)
WIDTH AT BACKUP LENGTH	9.4M (30 10)	9.2M (30 7)
96" TL-3	2.4 M (96")	2.4M (96)
WIDTH AT BACKUP LENGTH	10.6M (34 9)	10.6M (34 9)
120 " TL-3	3.1 M (120")	3.1 M (120")
WIDTH AT BACKUP LENGTH	10.3 M (33 10)	10.3 M (33 10)

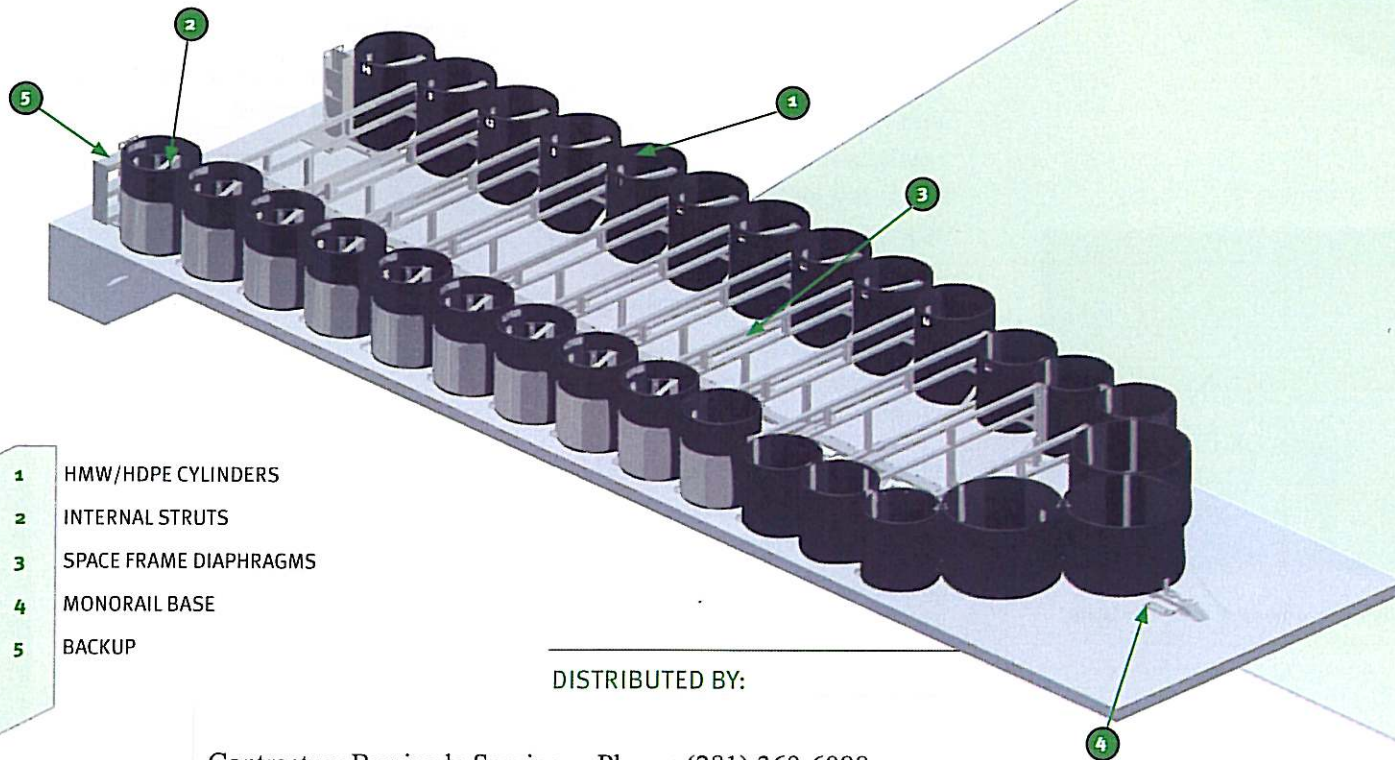

- 1 HMW/HDPE CYLINDERS
- 2 INTERNAL STRUTS
- 3 SPACE FRAME DIAPHRAGMS
- 4 MONORAIL BASE
- 5 BACKUP

DISTRIBUTED BY:

Contractors Barricade Service Phone: (281) 360-6098
 P.O. Box 913 Fax: (281) 360-6091
 Porter, TX 77365 Email: cbs.tx@msn.com



www.quixtrans.com

35 East Wacker Drive • Chicago, IL 60601
 Tel: (312) 467-6750 • Fax: (312) 467-9625
www.energyabsorption.com



General Specifications for the REACT 350 Wide Systems are subject to change without notice to reflect improvements and upgrades. Additional information is available in the Product Manual for this system. Contact Energy Absorption System for details.

REACT 350[®] WIDE SYSTEM