

# ACZ-350™

## Portable TL-2 & TL-3 End Treatment



### FEATURES AND BENEFITS

- Simple and Fast Installation
- No Vaulting
- Safely Contains Errant Vehicle
- Accommodates Impacts up to 2,000 kg, (4,500 lbs) Traveling at Speeds up to 100 km/h (62 mph)
- Protects Permanent or Temporary, Steel or Concrete Barrier
- Ideal for Work Zones
- No Foundation or Anchoring

### OVERVIEW


The ACZ-350™ System combines ease of use and NCHRP 350, gating, non-redirective TL-2 and TL-3 crash cushion performance for work zone protection. This partially reuseable crash cushion can be easily transported and installed with no roadway anchors.

### SUPERIOR IMPACT PERFORMANCE

The unique design of the ACZ-350 System protects errant vehicles from impacting concrete barrier ends, and also contains the errant vehicle from vaulting into the work zone.

### NON-REDIRECTIVE, GATING CRASH CUSHION SYSTEM

All crash cushions defined as non-redirective and gating require a clear zone. Clear zones are areas behind the crash cushion that NO workers, machinery, obstructions or other debris could interfere with an errant vehicle. This area should also remain relatively flat. If there are any questions or concerns, please contact your local Energy Absorption Systems, Inc. representative.

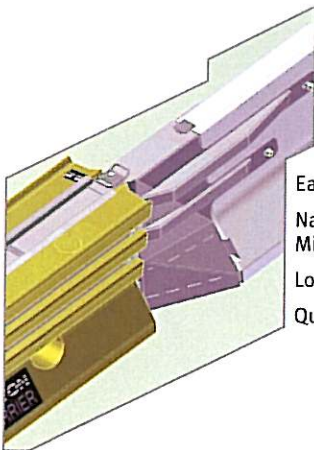

Easy Clean-Up  
Narrow Profile  
Minimum Intrusion  
Low Cost/ Affordable  
Quick/Easy To Move



**ENERGY ABSORPTION**  
SYSTEMS, INC.

SAVING LIVES BY DESIGN™

[www.energyabsorption.com](http://www.energyabsorption.com)

## EASY DEPLOYMENT AND REMOVAL


The ACZ-350 System can be easily unloaded and positioned without cranes or heavy equipment. Deployment involves three simple steps:

1. Unload
2. Position and pin barrier sections
3. Fill Segments with water

## SPECIFICATIONS

### TL-3

Length	31'- 7" (9.6 m)
Width	1'- 10" (.6 m)
Height	2'- 9" (.8 m)
Weight (empty)	1350 lbs
Weight (full)	6160 lbs

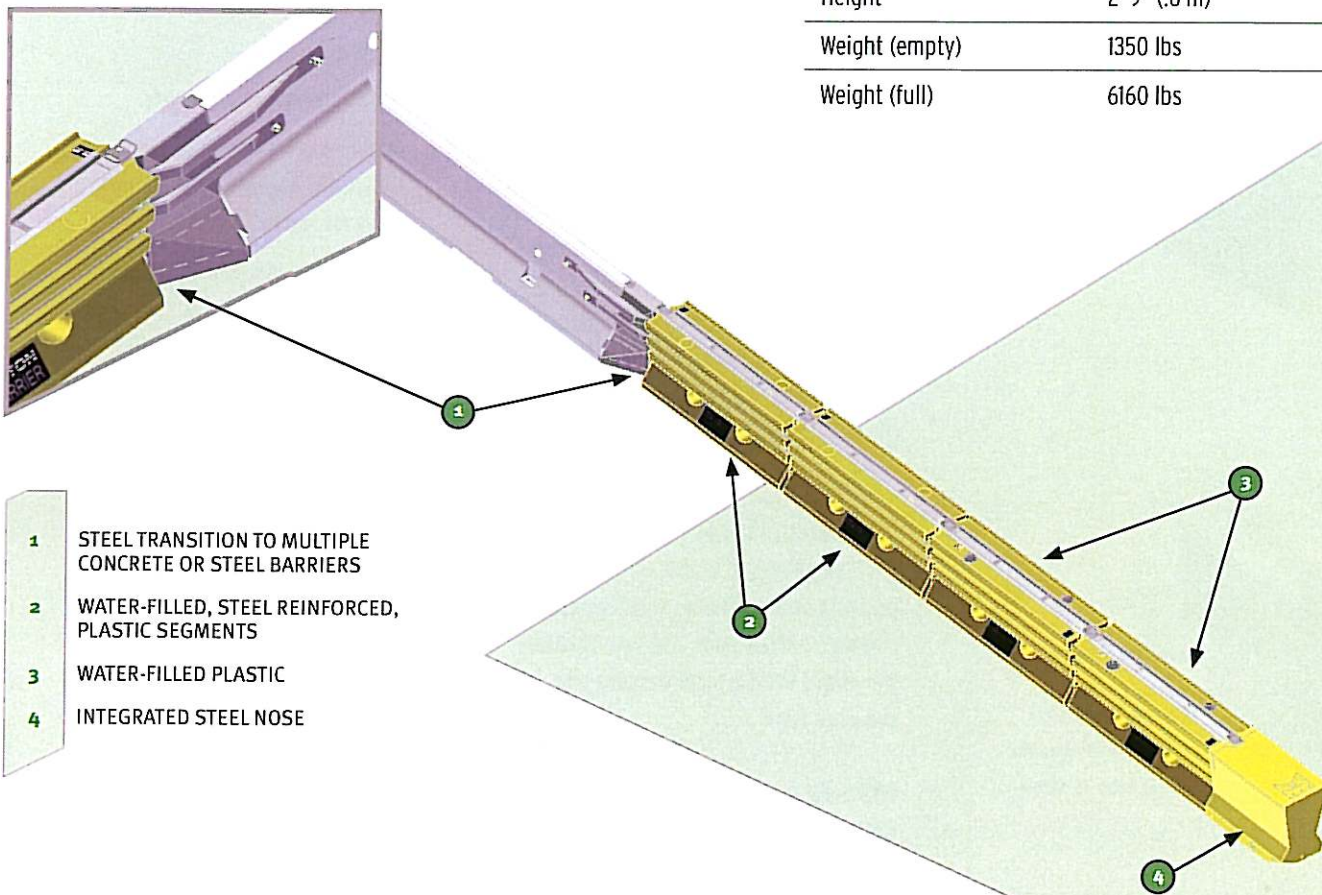

- 1 STEEL TRANSITION TO MULTIPLE CONCRETE OR STEEL BARRIERS
- 2 WATER-FILLED, STEEL REINFORCED, PLASTIC SEGMENTS
- 3 WATER-FILLED PLASTIC
- 4 INTEGRATED STEEL NOSE

DISTRIBUTED BY:

Contractors Barricade Service  
P.O. Box 913  
Porter, TX 77365

Phone: (281) 360-6098  
Fax: (281) 360-6091  
Email: [cbs.tx@msn.com](mailto:cbs.tx@msn.com)



35 East Wacker Drive • Chicago, IL 60601  
Tel: (312) 467-6750 • Fax: (312) 467-9625  
[www.energyabsorption.com](http://www.energyabsorption.com)

